


210 x 297 mm



corrosion protection:

hot dip galvanised as per
DIN EN ISO 1461 t ZN k

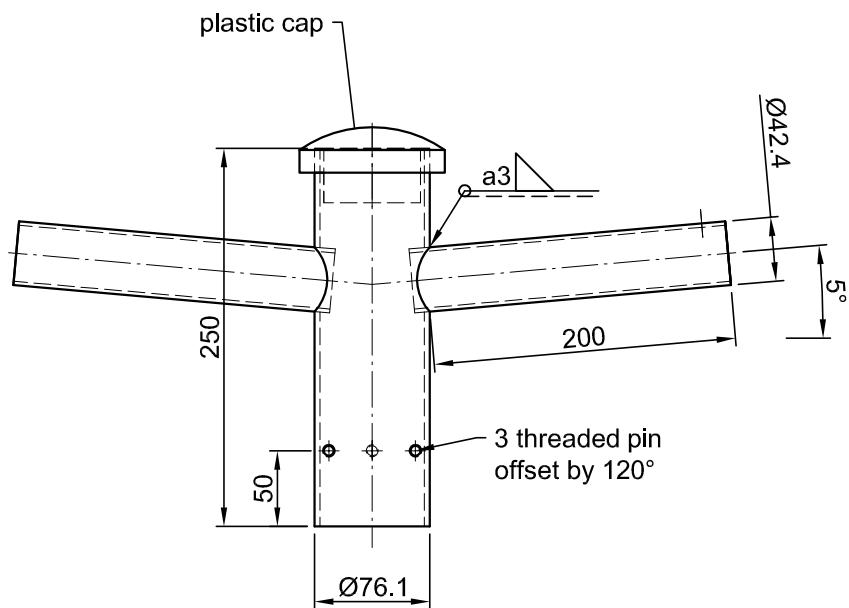

welded joints:

weld assessment group:
weld filler material:

weld sign:

weld preparation:

welding procedure:

DIN EN ISO 5817 'D'
DIN EN ISO 2560 /
/ 14341 / 14171
EN 2553
DIN EN ISO 9692
DIN 1910; EN 14610

not marked welded joints: a = 3mm

preheat temperature: t ≥ 30mm --> 100°-150°

submerged arc welding: at least 60%

drilling for galvanizing

(intended use)


(permissible variation)

(surface)

scale 1:5

/St

(material, halffinished prod.)
1.0038/S235JR+N



state in Arbeit

Allg. toleranz
EN ISO 13920-BG
DIN ISO 2768-c

Double bracket
DAF 60/42-200
storage type

				date	name
			dealing	27.03.2017	Lang A.
			checked		BÖSL
			constr.		
			checked		
B	Schweißstempel; Bezeichnung	17.08.17	GRS		
A	Neuanlage	27.03.17	LAN		
state	design change	date	name	(EDP-Nr.)	N173902.dwg

EURO POLES

document number N173902

36015248

class

sheet

1

article number

Rev: B

(made for:)

(made through:)

Dieses Dokument ist gültig mit maschineller oder handschriftlicher Unterschrift. Techn. Änderungen bei der Ausführung ausschließlich EUROPOLES vorbehalten!

Europoles nimmt für Angebot, Zusammenstellungen, Formblätter, Beschreibungen und zeichnerische Darstellungen
Urheberrechtsschutz in Anspruch. Gebrauch, Vervielfältigung und Weitergabe nur mit vorheriger schriftlicher Genehmigung!

Europoles claims copyright for offers, lists, blanks, descriptions and drawings.
Use, duplication and handing over to third parties only with prior written permission.